


LAN Cable

Category 7e

HELUKAT® 600

S-STP



Cable structure

Inner conductor diameter:
Conductor material:
Core insulation:
Core colours:
Shielding 1:
Screen over stranding element:
Screen 1 over stranding:
Screen 2 over stranding:
Outer sheath material:
Outer diameter:
Outer sheath colour:

S-STP 4x2xAWG 23/1 FRNC

0,57 mm
Copper, bare
Foam-skin-PE
wh/bu, wh/og, wh/gn, wh/bn
-
Polyester foil, aluminium-lined
Cu braid
-
FRNC
approx. 7,5 mm
Blue Lilac similar to RAL 4005

Electrical data

Characteristic impedance:

100 Ohm ± 15 ohm at 1 to 100 MHz
100 Ohm ± 20 ohm at 101 to 1000 MHz

Loop resistance:

130 Ohm/km max.

Mutual capacitance:


43 nF/km nom.

Rel. propagation velocity:

79 %


Typical values

Frequency (MHz)	10	16	62,5	100	200	300	600	900	1000
Attenuation (dB/100m)	5,6	7,1	13,9	17,5	25,2	32,1	44,9	55,0	58,0
Next (db)	100,0	100,0	96,0	94,0	88,0	84,0	73,0	71,0	69,0
ACR (db)	94,4	92,9	82,1	76,5	62,8	51,9	28,1	16,0	9,0

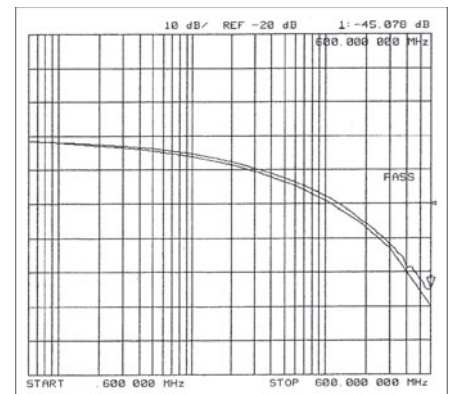

Technical data

Weight: approx. 60 kg/km
Min. bending radius for laying: 60 mm
Operating temperature range min.: -20°C
Operating temperature range max.: +60°C
Caloric load, approx. value: 0,60 MJ/m
Copper weight: 30,00 kg/km

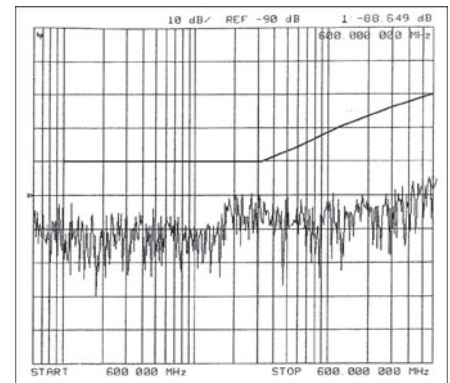

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 7e,
Flame-retardant acc. to IEC 60332-3, Smoke density acc. to IEC 61034, Halogen-free acc. to 60754-2, Corrosiveness acc. to EN50267-2-3

Application

HELUKAT®600 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction.

Part no.

80810, S-STP 4x2xAWG 23/1 FRNC (S/FTP)

Dimensions and specifications may be changed without prior notice.